



**Model Number**


**LUC4T-G5P-IU-V15**

**Features**

- Fixed target suppression
- Simple calibration
- Function monitoring
- Fail-safe behavior in the event of no echo
- Output signal 4 mA ... 20 mA/ 0 V ... 10 V
- Temperature compensation

**Diagrams**

**Characteristic response curves**

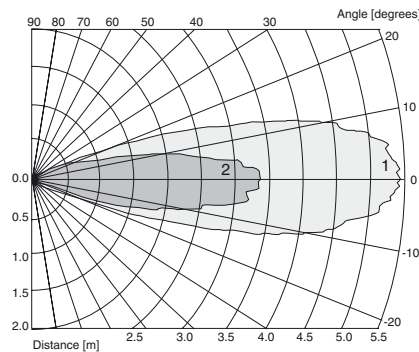


Curve 1: flat plate 100 mm x 100 mm  
Curve 2: round bar, Ø 25 mm

Release date: 2016-04-18 10:43 Date of issue: 2016-04-18 043702\_eng.xml

**Technical data**


<b>General specifications</b>	
Sensing range	0.3 ... 4 m , with fluids
Transducer frequency	approx. 85 kHz
<b>Indicators/operating means</b>	
LED green	Power on
LED red	2 Hz flashing: error
<b>Electrical specifications</b>	
Operating voltage $U_B$	20 ... 30 V DC , ripple 10 % <sub>SS</sub>
Power consumption $P_0$	≤ 1200 mW
<b>Output</b>	
Output type	1 analog output 4 ... 20 mA, $R_L \leq 500 \text{ Ohm}$ , error ≥ 21 mA 1 voltage output 0 ... 10 V, $R_L \geq 1000 \text{ Ohm}$ , error ≥ 10.5 V
Resolution	2 mm
Deviation of the characteristic curve	0.5 % of upper limit of measuring range
<b>Ambient conditions</b>	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
<b>Mechanical specifications</b>	
Degree of protection	IP65
Connection	5-pin V15 (M12 x 1) connector
Material	
Housing	PBT, polypropylene
Transducer	PTFE (diaphragm surface)
Mass	220 g
Mounting	G1½A connection
<b>Compliance with standards and directives</b>	
Standard conformity	
Standards	EN 60947-5-2:2007 + A1:2012 IEC 60947-5-2:2007 + A1:2012 EN 60947-5-7:2003 IEC 60947-5-7:2003
<b>Approvals and certificates</b>	
CCC approval	CCC approval / marking not required for products rated ≤36 V

**Dimensions**

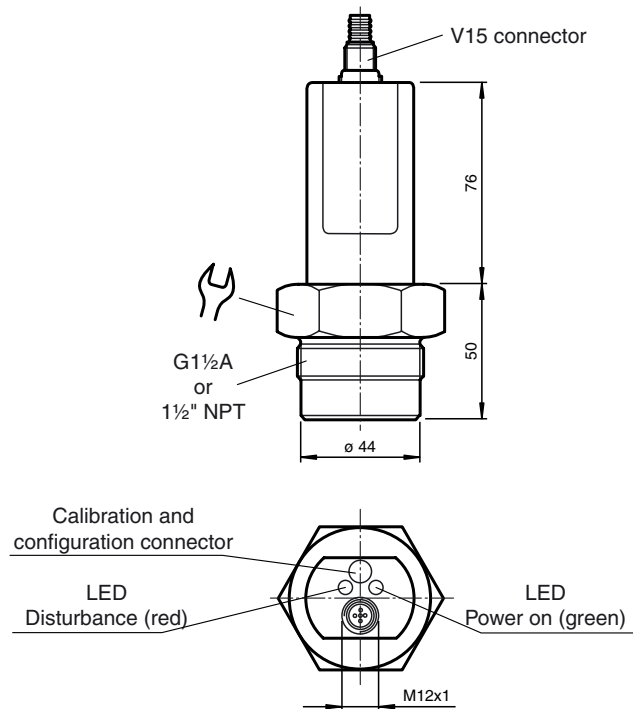

**Electrical Connection**

Standard symbol/Connection:

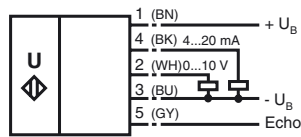

Core colours in accordance with EN 60947-5-2.

**Pinout**

**Connector V15**



**Accessories**

**UC-30GM-PROG**

**LUC4-Z30-G2V**

**LUC4-Z30-N2V**

**V15-G-2M-PVC**

Female cordset, M12, 5-pin, PVC cable

**UC-30GM-TEMP**

Temperature sensor

**Product description:**

The LUC4T-... ultrasonic sensor is especially designed to measure the fill level of liquids. With its Teflon-coated surface, the sensor is outstandingly suited for use with corrosive liquids. The masking of fixed objects permits the sensor to be deployed in locations in which struts or other internal structures extend into the measuring field. Sensors of the LUC4T-... series feature a 4 mA ... 20 mA current and 0 V ... 10 V voltage output as standard. The outputs have fail-safe behaviour in the event of a fault.

**Function**

The ultrasonic converter sends out an acoustic pulse. This pulse is reflected by the contents of the container and registered by the converter after traveling the measurement distance.

A microprocessor evaluates the echo signals and determines the fill level.

Sources of interference such as weld seams, fixed installations, etc. are suppressed reliably via the masking of fixed objects.

Temperature-related changes of the velocity of sound are compensated.

**Measuring system:**

A measuring system consists of a LUC4T-...-IU-V15 ultrasonic level sensor and a DA5... display unit or power supply. The LUC4T-...-IU-V15 ultrasonic level sensor can also be connected directly to a PLC.

Release date: 2016-04-18 10:43 Date of issue: 2016-04-18 043702\_eng.xml

**Compensation:**

Compensation (not installed)	Compensation (installed)	Plug position
1. Empty TEACH-IN simulation of 0 % level (wait 15 s)	1. Empty TEACH-IN approach 0 % level in container (wait 15 s)	T
Accept empty value Empty value accepted (red LED flashing) Empty TEACH-IN complete	Accept empty value Empty value accepted (red LED flashing) Empty TEACH-IN complete	A1 A1 T
2. Full TEACH-IN simulation of 100 % level (wait 15 s)	2. Full TEACH-IN approach 100 % level in container (wait 15 s)	T
Accept full value Full value accepted (red LED flashing) Full TEACH-IN complete	Accept full value Full value accepted (red LED flashing) Full TEACH-IN complete	A2 A2 T
TEACH-IN complete	TEACH-IN complete	T

**Caution**

The connection "Echo" (Pin 5) is only for diagnosis purposes. It has to be left unconnected. A short circuit or the connection of a voltage to the connection "Echo" (Pin 5) can cause damage to the sensor!

Release date: 2016-04-18 10:43 Date of issue: 2016-04-18 043702\_eng.xml